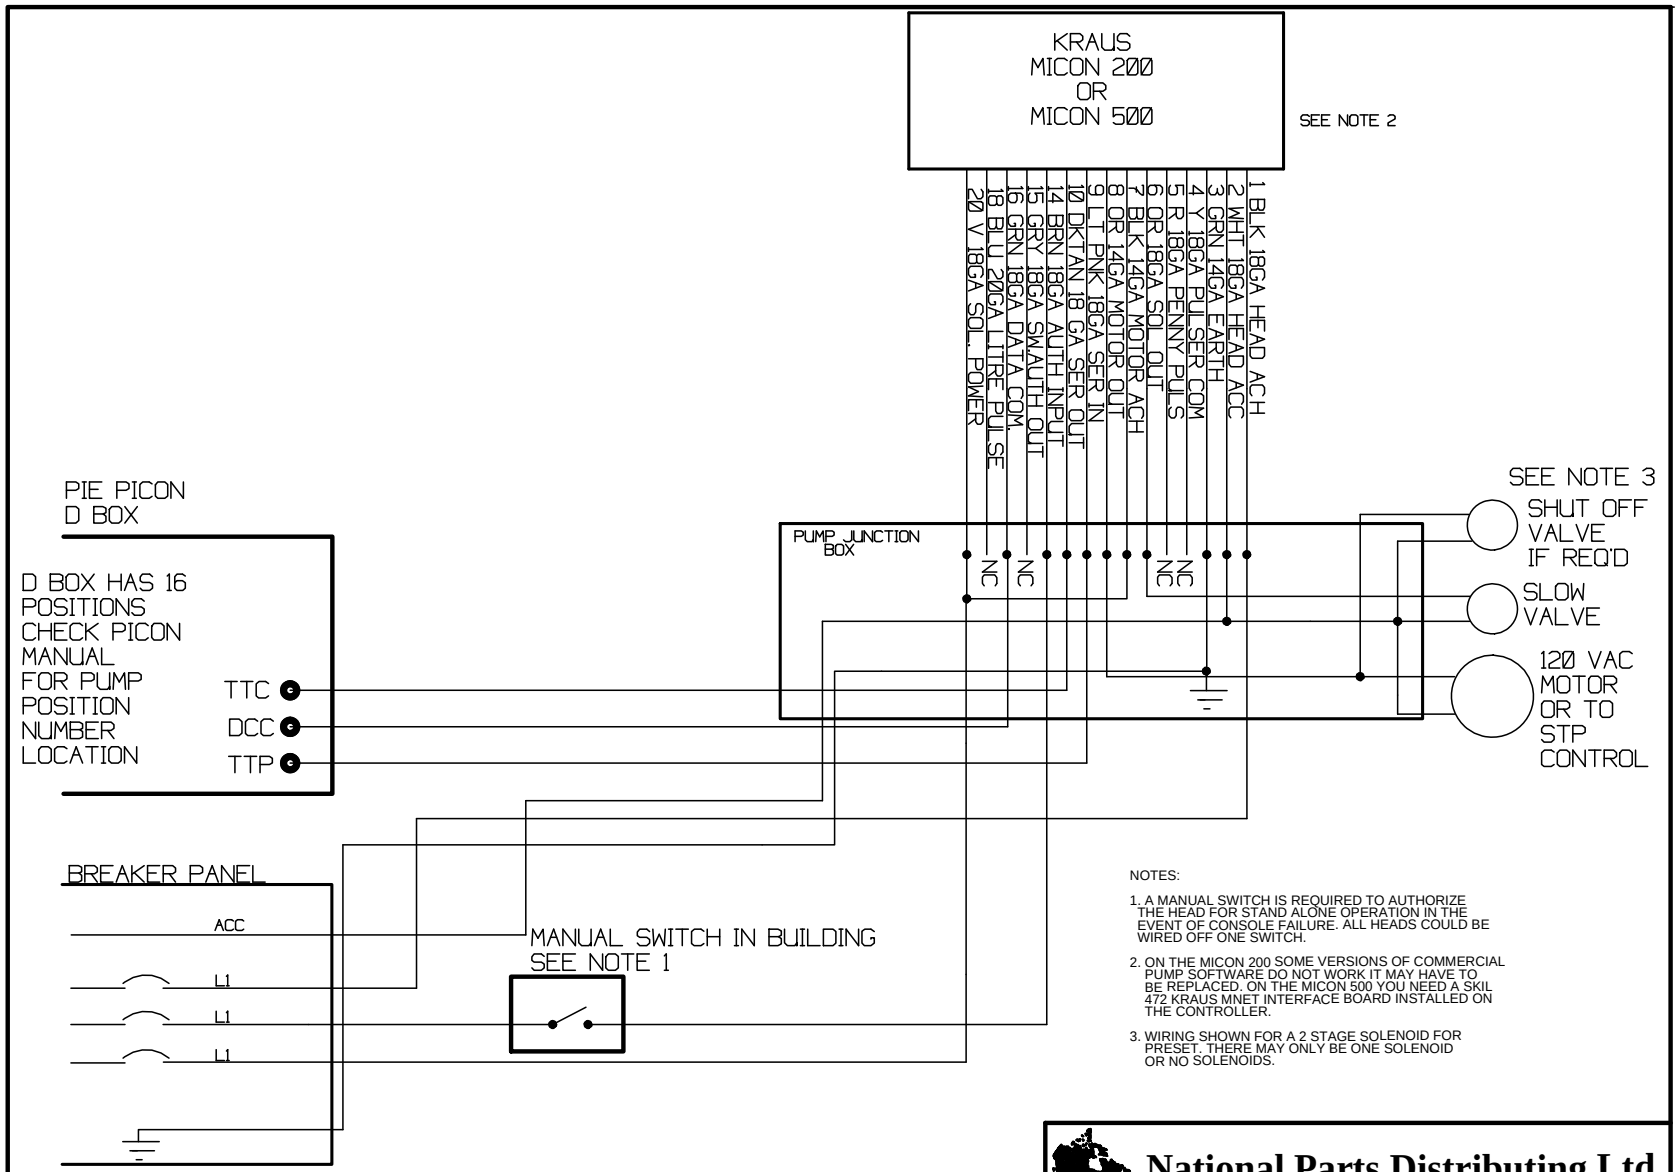


NOTES:

1. A MANUAL SWITCH IS REQUIRED TO AUTHORIZE THE HEAD FOR STAND ALONE OPERATION IN THE EVENT OF CONSOLE FAILURE. ALL HEADS COULD BE WIRED OFF ONE SWITCH.
2. ON THE MICON 200 SOME VERSIONS OF COMMERCIAL PUMP SOFTWARE DO NOT WORK IT MAY HAVE TO BE REPLACED. ON THE MICON 500 YOU NEED A SKIL 472 KRAUS MNET INTERFACE BOARD INSTALLED ON THE CONTROLLER.
3. WIRING SHOWN FOR A 2 STAGE SOLENOID FOR PRESET. THERE MAY ONLY BE ONE SOLENOID OR NO SOLENOIDS.

**National Parts Distributing Ltd.**

TITLE:
PROGRESSIVE INTERNATIONAL ELECTRONICS SERIAL CONSOLE TO KRAUS MICON 200 AND MICON 500 ELECTRONIC HEAD WIRING SCHEMATIC

| DATE- | SCALE- | DRN BY- | REV.DATE- |
|---|---|---|---|
| FEBRUARY 2002 | NTS | HFB | 06/2010 |

| DR.NO.- | REV.NO.- |
|---|---|
| A00379 | 1 |