RICHARDS R1290 (1½") AUTOMATIC SHUT-OFF NOZZLES

For Heavy-Duty, High-Flow Truck, Bus, and Home Fuel Oil Delivery Service

Features:

◆ **Venturi-type shut-off mechanism** - for automatic shut-off.

◆ **Aluminum body** - lighter in weight and easier to maneuver than other nozzles on the market.

◆ **Two-position hold-open device.**

◆ **One-hand control of hold-open mechanism** - easy setting of flow rate.

◆ **Easily replaced spout** - simply remove the spout retainer nut.

◆ **Right angle design** - provides larger lever area for better grips and easier control, permitting the nozzle to fit into awkward spaces close to walls and into corners.

◆ **Built-in outlet check valve** - meets all known requirements of the Division of Measurement Standards.

◆ **Dual poppets** - make nozzle easy to open against high inlet pressure.

◆ **Maximum static operating pressure 50 psi.**

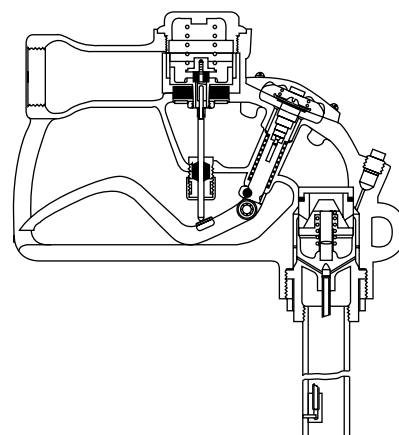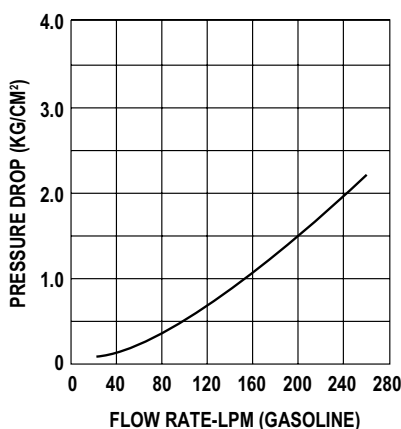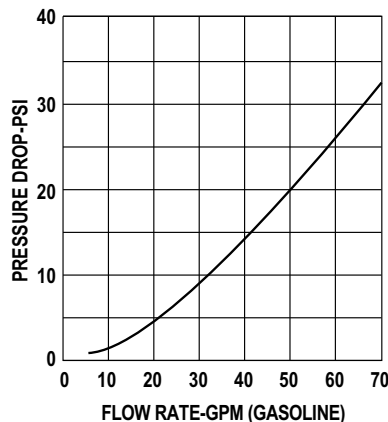## Materials

Body: aluminum
Main stem: stainless steel
Packing: Graphite with Teflon®
Main Disc: Viton®
Inlet Size: 1½" NPT

Replacement Spout

Product #	O.D.		Length		Weight	
	in.	mm.	in.	mm.	lbs.	kg.
675	1⅜"	35	8½"	215	1.5	.68

FLOW RATE-GPM (GASOLINE)

FLOW RATE-LPM (GASOLINE)

IMPORTANT: Richards products should be used in compliance with applicable federal, state and local laws and regulations. Product selection should be based on physical specifications and limitations and compatibility with the environment and materials to be handled. Richards MAKES NO WARRANTY OF FITNESS FOR A PARTICULAR USE. All illustrations and specifications in this literature are based on the latest product information available at the time of publication. Richards reserves the right to make changes at any time in prices, materials, specifications and models and to discontinue models without notice or obligation.

Ordering Specifications

Product #	in.	mm.	lbs.	kg.	Description
NR600	1½"	38	6.8	3.1	New